


# D180

## Contactless mPOS

Contactless, EMV Chip, Magstripe | PCI PTS 5.x, SRED | iOS, Android, Windows compatible | Bluetooth Connectivity | MasterCard Contactless | Visa payWave

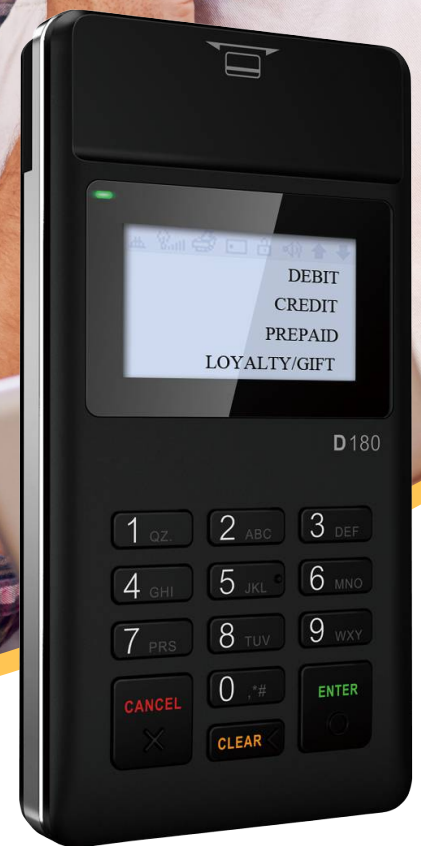

PAX's D180 is a compact, stylish and cost-effective wireless mPOS terminal, PCI PTS 5.x certified, which connects to a wide range of Smart Phones, Tablets and PCs. The D180 delivers a seamless transaction experience: easy to use, convenient and fast. Supporting Bluetooth and USB communications, and with buzzer, the D180 streamlines your payment business whenever or wherever necessary.

Acquirers and Processors can generate new revenue streams by enabling a whole suite of new Merchant categories to accept card payments. The advanced architecture used inside the D180 helps reduce post-development and maintenance costs.


# FEATURES & BENEFITS

## Reliability & Security

- Accepts EMV smart cards, magnetic stripe and contactless transactions
- Stylishly designed for comfort and convenience
- New software architecture to reduce your development costs
- PCI PTS 5.x, SRED

## Flexible Platform

- Compatible with multiple platforms - iOS / Android / Windows
- USB ports for high-speed data transmission
- Supports Bluetooth connectivity

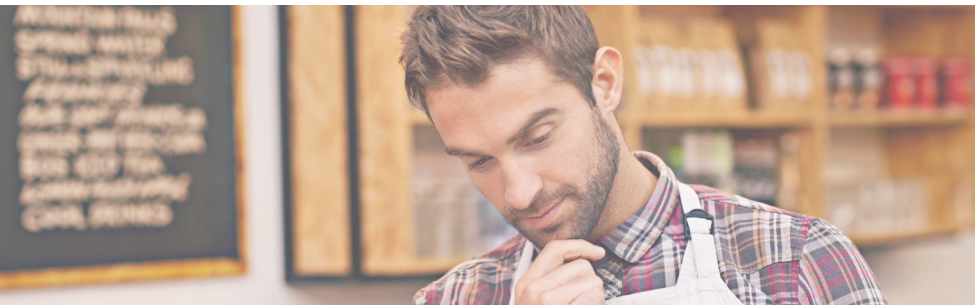

# D180

## Contactless mPOS

## SPECIFICATIONS

<b>OS</b>	Monitor
<b>Processor</b>	32-bit ARM CPU
<b>Memory</b>	128KB SRAM + 1MB Flash   External Storage: 4MB Flash
<b>Card Readers</b>	Magnetic Card Reader   Smart Card Reader   Contactless Card Reader
<b>Display</b>	128 x 64 pixels LCD
<b>Audio</b>	1 x Buzzer
<b>Physical Keypad</b>	10 x Numeric / Alphabet Keys   3 x Function Keys   1 x ON/OFF Key
<b>Communication</b>	Bluetooth (4.0 & 2.1)
<b>Peripheral Ports</b>	1 x Micro USB 2.0
<b>Battery</b>	3.7V / 250mAh Rechargeable Li-ion Battery
<b>Adapter</b>	Input: 100 - 240V AC, 50Hz / 60Hz   Output: 5.0V DC, 1.0A
<b>Physical</b>	L x W x H (mm) : 116 x 59.6 x 13   Weight (g) : 145 (Including Battery)
<b>Environmental</b>	0°C ~ 50°C (32°F ~ 122°F) Operating Temperature -10°C ~ 70°C (14°F ~ 158°F) Storage Temperature 10% ~ 93% Relative Humidity, Non-condensing
<b>Certifications</b>	PCIPTS 5.x, SRED   EMV L1 & L2   EMV Contactless L1   Visa payWave MasterCard Contactless   American Express Pay   Discover D-PAS MasterCard TQM   Interac_Flash L2   NSICC L2   ABECs   UL   CE FCC   Anatel   RoHS   IC

